



# BOARD CLAMP

YOUR 3RD HAND®

Timber decking and cladding



# BOARD CLAMP

## BENEFITS



ADJUSTABLE ACCORDING TO BOARD WIDTH



SELF-LOCKING ADJUSTMENT



GUARANTEED TO SAVE TIME



CAN BE USED ONE-HANDED




EXCEPTIONALLY STRONG



UNCOMPROMISING QUALITY AND PERFORMANCE

## YOUR 3<sup>rd</sup> HAND®

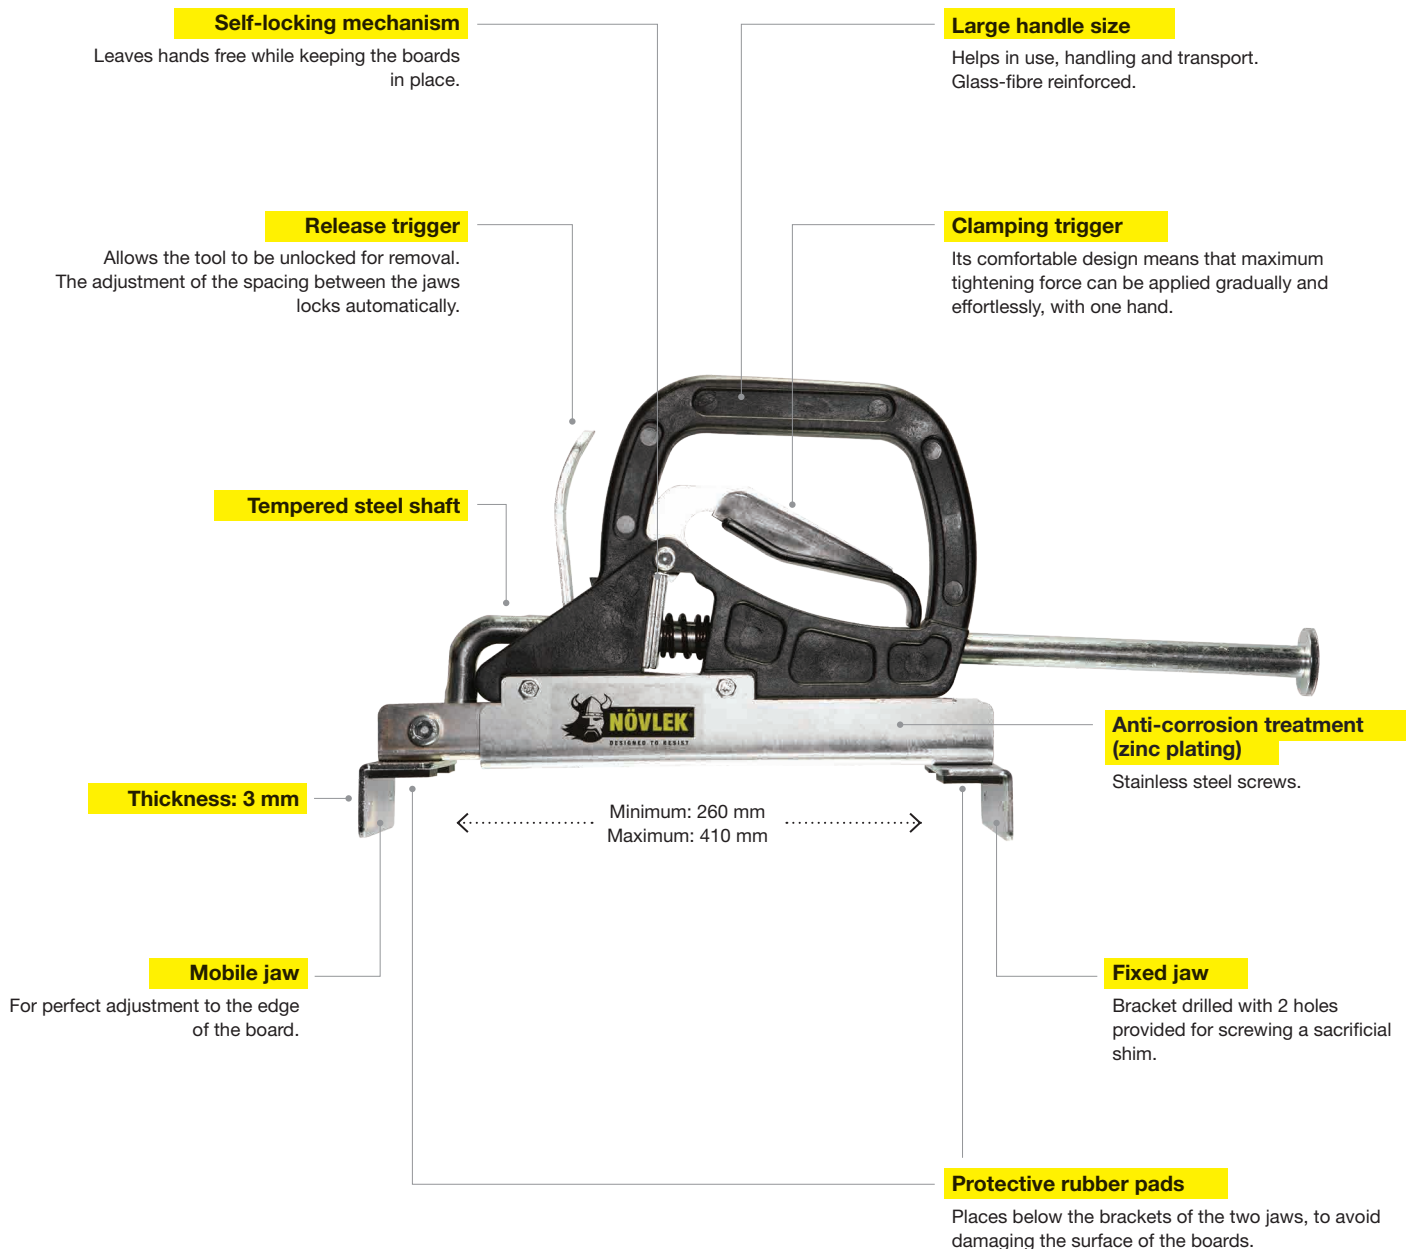




# USE

Using NÖVLEK® board clamps when installing decking or cladding boards allows them to be tightened, straightened and held in place quickly and effortlessly.



Using several board clamps together significantly improves the efficiency, quality and speed of installation.

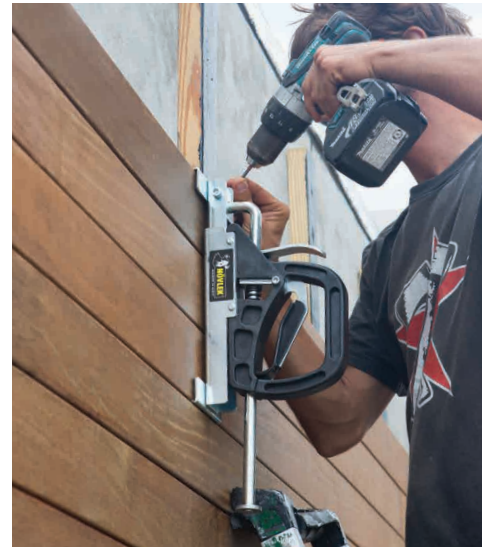

Suitable for installing cladding boards, both vertical and horizontal.



## Only one hand needed

Manipulated and operated with one hand, suitable for right- and left-handed use. Gradual, effortless tightening with the comfortable trigger.



## Adjusted once and for all

Tool unlocked for removal with the front trigger. The jaw spacing is adjusted and locked automatically for the entire job, saving considerable time and making it extremely easy to use.



## Narrow boards

The NÖVLEK® board clamps can be used with narrow boards. In this case, a sacrificial shim is needed. It can be screwed to the jaw temporarily, with the two holes provided for this purpose.




## Can be used with the DROP™ profile

A short bracket is available for use with boards having the DROP™ covering profile (from NÖVLEK®) or similar.


## Why choose the NÖVLEK® board clamp, rather than a lever-arm straightener supported on the joist?

The NÖVLEK® board clamp

- Does not damage the edge of the boards, or the joists.
- Allows tightening and straightening up to the last board.
- Can be placed anywhere, alone or with several aligned side by side, when the situation requires it.
- No limit on its use
  - even in the narrowest areas or close to an obstacle;
  - on the connections and spacers between joists;
  - whatever the height, width or material of the joists or beams;
  - regardless of whether the joists are covered by overhanging bituminous strips.
- Acts only on the board, without applying any force to the joist. There is no risk of displacing or distorting the joist.
- Keeps the finishing boards in place before they are screwed.



NÖVLEK® board clamp



Lever-arm straightener

# BOARD CLAMP



## CONTENTS



x1



Only for BJPD-04

x1




x3



x3



x3



Profile	Article code	EAN code	Item		Box 5 Items/Box	
			Dimensions (mm)	Weight	Dimensions (mm)	Weight
Square edge	BJPD-01	5425 03355 400 2	450 x 120 x 365	3,83 kg	585 x 380 x 500	20,12 kg
Drop	BJPD-04	5425 03355 400 2	450 x 120 x 365	3,85 kg	585 x 380 x 500	20,22 kg



The information shown in this document is given for information purposes and is not contractual. It may be changed at any time without prior notice. All rights reserved ARCHIWOOD sprl.